

PS Net

Electromagnetic Lock Single Door 280KG




Single door 280KG
Electromagnetic lock

EL-600D, EL-600SD, EL-600SZ, EL-600ST, EL-600SA


Specifications

EL-600	Without indicator lights		
EL-600SD	LED, door sensor		
EL-600ST	LED, door sensor, Time delay		 
EL-600SZ	LED, door sensor, Buzzer		 
EL-600SA	LED, door sensor, Buzzer (9Wires)		 
Lock size	250Lx48.5Wx25H(mm)		
Armature Plate	180Lx38Wx11H(mm)		
Holding Force	280kg (600Lbs)		
Voltage	DC12V or DC24V (adjustable)		
Current Draw	12V/500mA 24V/250mA		
Signal Output	Dry Contact, Max Rating of Contact Current 3A		
Lock Type	Power-on to lock (NC)		
Operating Temp	-10°C ~ 55°C (14°F~131°F)		
Suitable Humidity	0~90%(non-condensing)		
Finishes for Shell	Anodized aluminum surface texture processing		
Finishes for Magnetic	Zinc		
Finishes for Armature	Zinc		
Weight	2kg		
Bracket Option	LZ Bracket, U Bracket, I Bracket, FG Bracket for Full Frameless Glass Door		

Dimensions

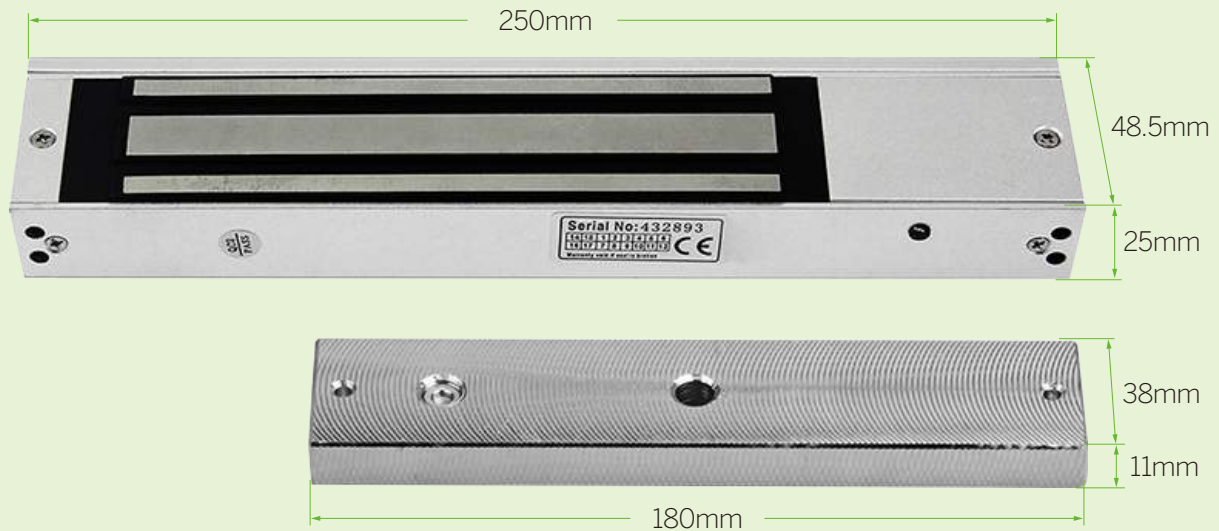

Wiring diagram

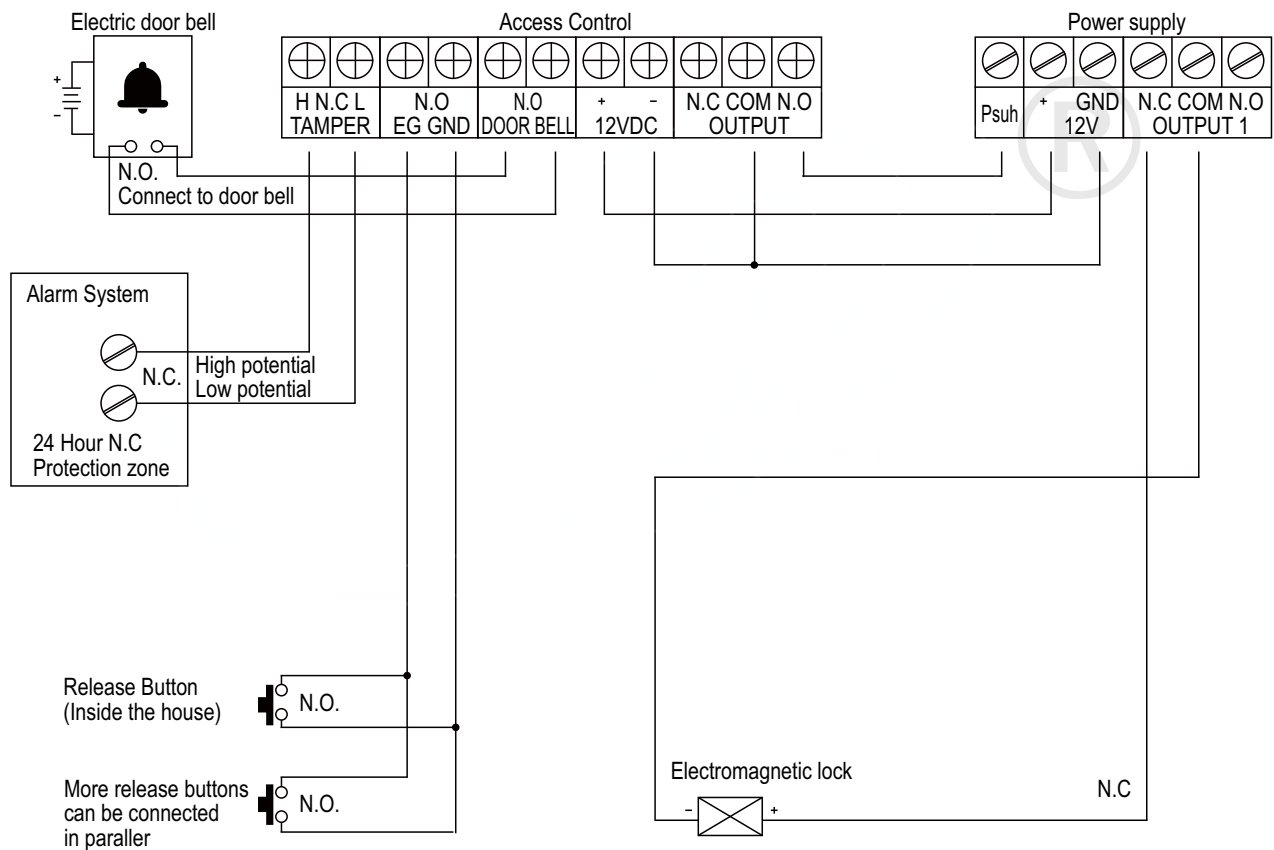

PS Net Co., Ltd.

98/24 Soi Supapong1 Nongbon Prawet Bangkok Thailand 10250
Tel 02-743-9008, Fax 02-746-4429
www.psnetthailand.com